


KINAX WT 710

Transmitter for angular position



Unit in field type housing



Application

The KINAX WT 710 (Figs. 1 to 3) converts the angular position of a shaft into a **load-independent** direct current signal, proportional to the angular position. The unit is **contact free**. The compact housing has made this unit ideal for building onto other equipment and plant.

Features / Benefits

● Measuring input: Angular position

Measured variable	Measuring range limits
Angular position	0...5° to 0...270 °

- Measuring output: DC current signal (load-independent, 2-, 3- or 4-wire connection)
- Potentiometer for adjusting span / Optimum matching of desired measuring range
- Direction of rotation: Output signal increases for clockwise or counter-clockwise rotation
- Capacitive scanning system / No wear and low annual maintenance
- Low influence from bearing play, < 0.1%
- Accuracy ≤ 0.5% for ranges ≤ 150°
- Torque < 0.001 Ncm
- Drive shaft fully rotatable without stops at instruments without additional gear
- Available with type of protection "Intrinsic safety" EEx ia IIC T6 / Can be mounted in hazardous areas
- Unit in field type housing / Compact for building onto other equipment and plant

Technical Data

Measuring input

Measured quantity: Angle of rotation α °

Measuring principle: Capacitive method
 Differential capacitor with contact-free, non-wearing positional pick-up.
 Drive shaft fully rotatable without mechanical stops



Fig. 1. KINAX WT 710 with shaft dia. 2 mm.



Fig. 2. Transmitter KINAX WT 710 and additional gear.



Fig. 3. Pressure gauge fitted with KINAX WT 710 transmitter.

Measuring ranges: 0 ... ≥ 5 to 0 ... ≤ 270 ° (without gear)
 Preferred ranges 0...10, 0...30, 0...60, 0...90, 0...180 or 0...270 °
 0...≥ 10 ° to 0...48 turns (with additional gear)

KINAX WT 710

Transmitter for angular position

Drive shaft diameters:	2 or 6 mm resp. 1/4"
Frictional torque:	< 0.001 Ncm with shaft dia. 2 mm < 0.03 Ncm with 6 mm resp. 1/4", without additional gear Approx. 0.6 ... 3.2 Ncm with addi- tional gear, depending on transmis- sion ratio
Sense of rotation:	Clockwise or counterclockwise (seen from the shaft side). The same transmitter can be used for both directions of rotation. A switch has to be changed, however, to reverse the direction on transmitters with ranges 0...> 150 to 0...≤ 270 \curvearrowright , see "Settings".

Measuring output \rightarrow

Output variable I_A :	Load-independent DC current, proportional to the input angle
Zero point correction:	Approx. $\pm 5\%$
Span adjustment:	Approx. +5 / -30%, see "Feature 7."
Current limitation:	I_A max. 40 mA
Standard ranges:	0...1 mA, 3- or 4-wire connection 0...5 mA, 3- or 4-wire connection 0...10 mA, 3- or 4-wire connection 4...20 mA, 2-wire connection or 0...20 mA, 3- or 4-wire connection adjustable with potentiometer 4...20 mA, 3- or 4-wire connection 0...20 mA, 4-wire connection
Non-standard ranges:	0...> 1.00 to 0...< 20 mA 3- or 4-wire connection
External resistance (load):	$R_{\text{ext. max. [k}\Omega]} = \frac{12 \text{ V}}{I_A \text{ [mA]}}$ (for instruments with DC-, AC power supply by DC, AC power pack, with electric isolation) $R_{\text{ext. max. [k}\Omega]} = \frac{H \text{ [V]} - 12 \text{ V}}{I_A \text{ [mA]}}$ (for instruments with DC power supply, without electric isolation) I_A = Output signal end value
Residual ripple in output current:	< 0.3% p.p.
Response time:	< 5 ms

Accuracy

Reference value:	Measuring range
Basic accuracy:	Limit of error $\leq 0.5\%$ for ranges 0...≤ 150 \curvearrowright Limit of error $\leq 1.5\%$ for ranges from 0...> 150 to 0...270 \curvearrowright
Reproducibility:	< 0.2%
Reference conditions:	
Ambient temperature	23 °C \pm 2 K
Power supply	H = 18 V
Output burden	$R_{\text{ext}} = 0 \Omega$
Influence effects (maxima): (included in basic error)	
Linearity error	$\pm 0.4\%$ for ranges 0...≤ 150 \curvearrowright $\pm 1.4\%$ for ranges from 0...> 150 to 0...270 \curvearrowright
Dependence on external resistance $\Delta R_{\text{ext. max.}}$	$\pm 0.1\%$
Power supply influence	$\pm 0.1\%$

Additional errors (maxima):

Temperature influence (-25...+ 70°C)	$\pm 0.2\% / 10 \text{ K}$
Bearing play influence	$\pm 0.1\%$

Power supply H \rightarrow

DC and AC voltage:	Nominal voltages and tolerances see "Table 1"
-----------------------	--

Table 1:

Nominal voltages U_N	Tolerances
24... 60 V DC / AC	DC - 15...+ 33%
85...230 V DC / AC	AC $\pm 15\%$

	(only possible with standard version non-Ex, with electric isolation, with DC, AC power pack (DC and 45...400 Hz)
Power consumption:	< 0.9 W resp. < 1.8 VA
Power supply effect on accuracy:	$\leq 0.1\%$ within the admissible power supply tolerance
DC voltage only ¹ :	12...33 V (possible with standard version, non- Ex, without electric isolation) 12...30 V (necessary with Ex version, type of protection "Intrinsic safety" EEx ia IIC T6, without electric isola- tion)

¹ Polarity reversal protection. The voltage must not fall below 12 V.

Max. residual ripple:	10% p.p.	Intrinsic safety:	Acc. to EN 50 020: 1994
Max. current consumption:	Approx. 5 mA + I _A	Test voltage:	2.2 kVeff, 50 Hz, 1 min. between... ... power supply and housing ... power supply and measuring output (with DC, AC power supply, with electric isolation)
Power supply effect on accuracy:	≤ 0.2% within the admissible power supply tolerance		500 Veff, 50 Hz, 1 min. all electrical connections to housing (with DC power supply, without electric isolation)

Mechanical withstand

Permissible vibration:	5 g every 2 h in 3 directions f ≤ 200 Hz		Housing protection:	IP 43 acc. to EN 60 529 without gear IP 64 with gear or other similar mounting
Shock:	3 × 50 g 10 shocks each in 3 directions		Impulse voltage withstand:	1 kV, 1.2/50 μs, 0.5 Ws IEC 255-4, Cl. II
Permissible static load on the shaft:	Drive shafts dia.	2 mm	6 mm resp. 1/4"	Permissible common-mode voltage: 100 V, 50 Hz
	Sense			
	radial max.	16 N	83 N	
	axial max.	25 N	130 N	

Installation data

Dimensions:	See section "Dimensional drawings"		Environmental conditions
Housing:	Metal, cast aluminium Corrosion resistant finish Plastic protection cap		Climatic rating:
Mounting position:	Any		Standard version Temperature –25 to + 70 °C Annual mean relative humidity ≤ 90% or version with improved climatic rating Temperature –40 to + 70 °C Annual mean relative humidity ≤ 95%
Electrical connecting terminals:	Screw-type terminals with indirect wire pressure, suited for max. 1.5 mm ² 2 glands PG 9, see "Feature 10."		Ex-version Temperature –40 to + 60 °C at T6 resp. –40 to + 75 °C at T5
Fixation:	3 cheesehead screws M3 or with 3 clamps		Transportation and storage temperature:
Weight:	Basic unit alone approx. 0.55 kg with additional gear approx. 0.9 kg		–40 to 80 °C

Regulations

Electromagnetic compatibility:	The standards EN 50 081-2 and EN 50 082-2 are observed
--------------------------------	--

Table 2: Data on explosion protection  **II 2 G**

Order Code	Type of protection "Intrinsic safety" Marking		Certificates	Mounting location of the instrument
	Instrument	Measuring output		
710 - 2 ...	EEx ia IIC T6	U _i = 30 V I _i = 160 mA P _i = 1 W C _i ≤ 10 nF L _i = 0	Type Examination Certificate ZELM 99 ATEX 0006	Within the hazardous area

KINAX WT 710

Transmitter for angular position

Table 3: Specification and ordering information

Order Code 710 –			
Features, Selection	*SCODE	no-go	
1. Version of the transmitter			
1) Standard, Measuring output not intrinsically safe	A		1
2) EEx ia IIC T6, CENELEC/ATEX Measuring output intrinsically safe	B		2
9) Other versions on request	B		9
2. Sense of rotation			
1) Calibrated for sense of rotation clockwise	D		. 1
2) Calibrated for sense of rotation counterclockwise	D		. 2
3) For "V" characteristic	E		. 3
4) Both senses of rotation, calibrated and marked	M		. 4
Lines 1 and 2: Instruments with ranges $0 \dots \geq 5$ to $0 \dots \leq 150 \text{ } \angle^\circ$ are usable in both senses of rotation. Instruments with ranges $0 \dots > 150$ to $0 \dots \leq 270 \text{ } \angle^\circ$ can be changed to the other direction. Chosen sense of rotation also applies for all versions with an additional gear . Line 3: "V" characteristic possible only without additional gear and without accessory kit for pressure gauge mounting Line 4: For measuring ranges $\leq 90^\circ$			
3. Measuring range (measuring input)			
1) $0 \dots 10 \text{ } \angle^\circ$		E	. . 1
2) $0 \dots 30 \text{ } \angle^\circ$		E	. . 2
3) $0 \dots 60 \text{ } \angle^\circ$		E	. . 3
4) $0 \dots 90 \text{ } \angle^\circ$		E	. . 4
5) $0 \dots 180 \text{ } \angle^\circ$		EM	. . 5
6) $0 \dots 270 \text{ } \angle^\circ$		EM	. . 6
9) Non-standard $[\angle^\circ]$ $0 \dots \geq 5$ to $0 \dots < 270$		E	. . 9
A) "V" characteristic $[\pm \angle^\circ]$ 		DM	. . A
Line A: Specify start M_A and end M_E of measuring range! Observe the limits for $(M_A [\pm \angle^\circ] \geq 10$ and $M_E [\pm \angle^\circ] \leq 150)$ and give, both angles separated by an oblique stroke, e.g. $[\pm \angle^\circ] 15 / 90!$			
Example of a "V" characteristic for the measuring range $[\pm \angle^\circ] 15 / 90$ and measuring output range of $0 \dots 20 \text{ mA}$ Line 9: With both senses of rotation calibrated, non-standard range: 0 to ≥ 5 till 0 to $< 90^\circ$			



1
2
9
.	1
.	2
.	3
.	4
.
.	.	1
.	.	2
.	.	3
.	.	4
.	.	5
.	.	6
.	.	9
.	.	A

Table 3: "Specification and ordering information" continued on next page!

Order Code 710 –					
Features, Selection		*SCODE	no-go		
4. Output signal (measuring output) / Connecting version					
A) 0... 1 mA, 3- or 4-wire connection				A	
B) 0... 5 mA, 3- or 4-wire connection				B	
C) 0...10 mA, 3- or 4-wire connection				C	
D) 4...20 mA, 2-wire connection or 0...20 mA, 3- or 4-wire connection (adjustable with potentiometer)		H		D	
E) 4...20 mA, 3- or 4-wire connection				E	
F) 0...20 mA, 4-wire connection		L	B	F	
Z) Non-standard, 3- or 4-wire connection [mA] <input type="text"/> 0... > 1.00 to 0... < 20				Z	
<p>Lines A to Z: R_{ext} max. see section "Technical data". 4-wire connection, with electric isolation only possible with DC, AC power supply (DC, AC power pack). 2-, 3- or 4-wire connection, without electric isolation only possible with DC power supply. Line F: Only possible with DC, AC power supply (DC, AC power pack)</p>					
5. Power supply					
1) 24 ... 60 V DC/AC, with electric isolation		F	BH	. 1	
2) 85 ... 230 V DC/AC, with electric isolation		F	BH	. 2	
A) 12 ... 33 V DC, without electric isolation		K	BL	. A	
B) 12 ... 30 V DC (Ex), without electric isolation		K	AL	. B	
<p>Lines 1 and 2: Not possible for DC, AC power supply at output signal "Feature 4, line D"! Version Ex only possible with line B!</p>					
6. Special features					
0) Without		Y		. . 0	
1) With				. . 1	
<p>Without special features (line 0): Order code complete. With special features (line 1): The features to be omitted must be replaced by an oblique stroke (/) in the order code until reaching the required features</p>					
7. Settings (span adjustment)					
A) Extended setting range + 5% / – 60% Restriction: for angle $\geq 60^\circ$, supplementary error 0.2% (also possible on versions with additional gear)			Y	. . . A	
8. Drive shaft					
B) Drive shaft special dia. 6 mm, length 6 mm		N	Y B	
C) Drive shaft special dia. 1/4", length 6 mm Instead of the standard shaft dia. 2 mm, length 6 mm		N	Y C	
9. Improved climatic rating					
D) Standard version			BY D . . .	
E) Ex versions			AY E . . .	

Table 3: "Specification and ordering information" continued on next page!

KINAX WT 710

Transmitter for angular position

Order Code 710 –			
Features, Selection	*SCODE	no-go	
10. Version with cable glands F) Locking plug instead of a second cable gland not possible with DC, AC power supply with electric isolation		FY	F
11. Additional gear, mounted (shaft dia. 6 mm, length 15 mm) When the transducer is used in combination with a reduction gear the drive shaft is fitted with stops and a slipping clutch			
G) Transformation 1 : 4	P	ENY	. G
H) Transformation 4 : 1	P	ENY	. H
J) Transformation 32 : 1	P	ENY	. J
K) Transformation 64 : 1	P	ENY	. K
N Transformation 1 : 1	P	ENY	. N
Not possible with "V" characteristic, not possible with drive shaft special			
12. Accessory kit for mounting			
L) No. 671 976 For pressure gauge mounting		ENPY	. . L
M) No. 846 800 Magnetic coupling for mounting to pressure gauge		ENPY	. . M
Not possible with "V" characteristic, not possible with drive shaft special, not possible with additional gear			
13. Test certificate			
P) Test certificate in German		Y	. . . P

* Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

Electrical connections


2-, 3- or 4-wire connection **without** electric isolation

2-wire connection (4...20 mA) 3-wire connection (different mA-signals) 4-wire connection (different mA-signals)

A = Measuring output...
 ... as 2-wire connection (4...20 mA, signal in output/powering circuit)
 ... as 3- or 4-wire connection (different mA-signals)

H = DC power supply H = 12...33 V
 resp. H = 12...30 V with Ex version
 R_{ext} = External resistance

4-wire connection **with** electric isolation

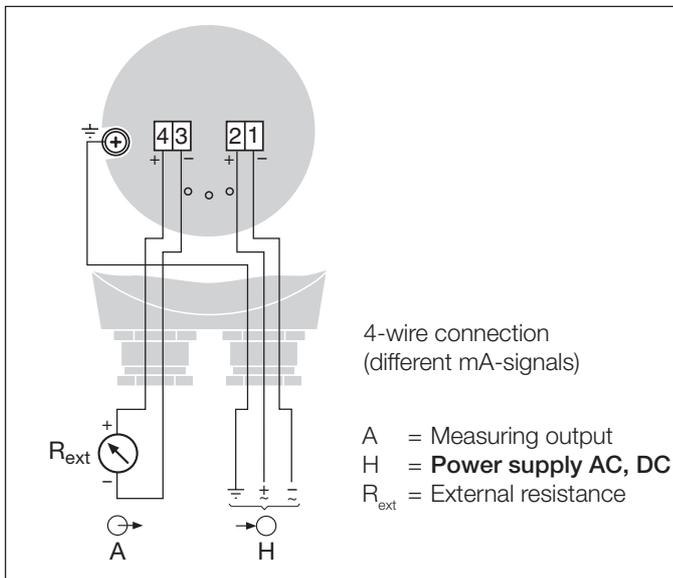

Settings




Fig. 4. Position of settings.
ZERO = Potentiometer for zero point
SPAN = Potentiometer for measuring range end value
S1 = Switch for reversing direction of rotation for $\alpha > 150^\circ$.



Fig. 5. Pressure gauge fitted with KINAX WT 710 measuring transmitter.



Fig. 6. KINAX WT 710 measuring transmitter and additional gear.

Standard accessories

Transmitter:

- 3 clamps
- 1 protection cap
- 1 operating instructions, in three languages: German, French, English
- 1 Ex approval, for instruments in Ex version only

Transmitter for fitting on measuring instruments with revolving indicator shaft:

- 1 mounting ring
- 1 sealing ring
- 1 driving fork for 1.5 mm dia. on measuring instrument
- 1 coupling lever for 2 mm dia. on angle transmitter
- 3 clamps
- 3 screws M4 x 8
- 1 protection cap
- 1 operating instructions, in three languages: German, French, English
- 1 Ex approval, for instruments in Ex version only

Transmitter with additional gear:

- 3 clamps
- 1 mounting foot
- 2 screws M5 x 10
- 2 spring washer
- 1 operating instructions, in three languages: German, French, English
- 1 Ex approval, for instruments in Ex version only

KINAX WT 710

Transmitter for angular position

Dimensional drawings

Basic unit

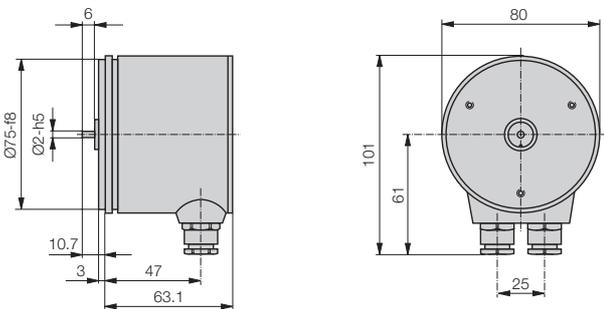


Fig. 7. Basic unit (fixation see Figs. 8 and 12).

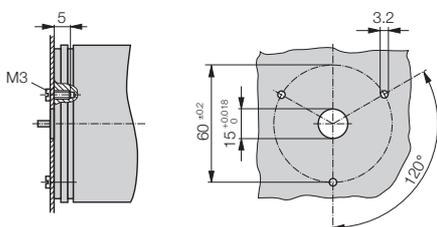


Fig. 8. Left: Fixing with cheesehead screws
Right: Drilling plan for cheesehead screws mounting.

Basic unit for fitting to measuring instruments with revolving indicator shaft

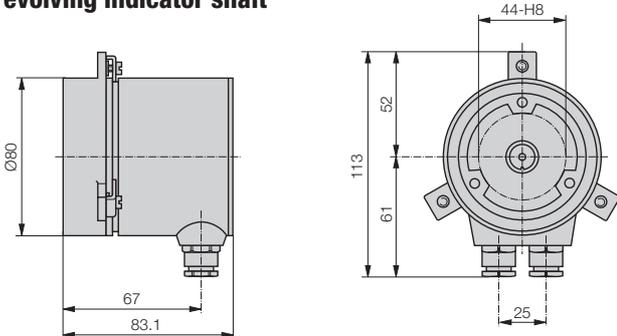


Fig. 9. Basic unit for fitting to measuring instruments with revolving indicator shaft. The measuring instrument must have an extended indicator shaft at the back (1.5 mm dia., length 6...7 mm).




Fig. 10. Drilling plan for measuring instrument housing.

Basic unit with additional gear

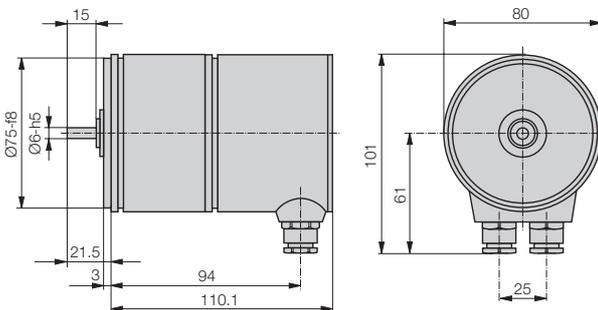


Fig. 11. Basic unit with additional gear (fixation see Fig. 12).

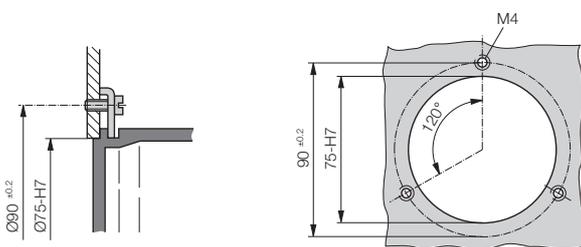


Fig. 12. Left: Fixing with clamps
Right: Drilling plan for clamp mounting.

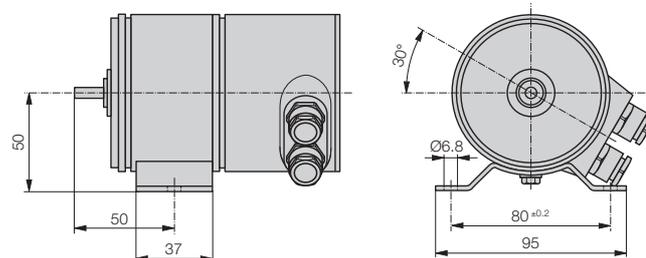


Fig. 13. Fixing with mounting foot.
(If the cable glands are in the way when mounted as above, the KINAX WT 710 should be rotated over 120°, after loosening the 3 screws holding the gear).

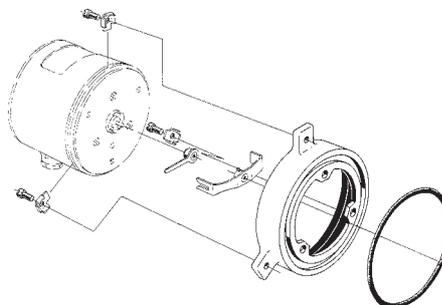


Fig. 14. Accessory kit for pressure gauge mounting (see "Feature 12.")