



Prüf- und Zertifizierungsstelle
ZELM Ex



(1) **EC-TYPE-EXAMINATION CERTIFICATE**
(Translation)

(2) Equipment and Protective Systems Intended for Use in
Potentially Explosive Atmospheres - **Directive 94/9/EC**

(3) EC-TYPE-EXAMINATION CERTIFICATE Number:

ZELM 01 ATEX 0052

(4) Equipment: **Temperature-transmitter SINEAX V 608 type 608-83**

(5) Manufacturer: **Camille Bauer AG**

(6) Address: **Aargauerstrasse 7, CH-5610 Wohlen**

(7) This equipment and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.

(8) The Prüf- und Zertifizierungsstelle ZELM Ex, notified body No. 0820 in accordance with Article 9 of the Council Directive 94/9/EC of 23 March 1994, certifies that this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmospheres, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report ZELM Ex 0480015073.

(9) Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

EN 50 014: 1997

EN 50 020: 1994

(10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.

(11) This EC-type-examination Certificate relates only to the design and construction of the specified equipment in accordance with Directive 94/9/EC. Further requirements of this Directive apply to the manufacture and supply of this equipment.

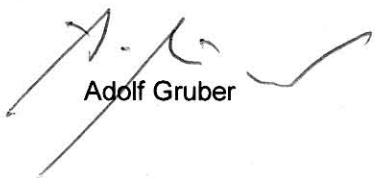
(12) The marking of the equipment shall include the following:



II 2 (1) G EEx ia IIC T6

Zertifizierungsstelle **ZELM Ex**

Braunschweig, March 02, 2001


Adolf Gruber



Sheet 1/3

EC-type-examination Certificates without signature and stamp are not valid. The certificates may only be circulated without alteration. Extracts or alterations are subject to approval by the Prüf- und Zertifizierungsstelle ZELM Ex. In the case of dispute, the German text shall prevail.



SCHEDULE

(13)

(14) **EC-TYPE-EXAMINATION CERTIFICATE ZELM 01 ATEX 0052**

(15) Description of equipment

The temperature-transmitter SINEAX V 608 type 608-83 is a two-wire transmitter for the temperature measurement. The head-mounted transmitter is used for the measurement and conversion of the input variables into a normalized output signal. Resistance and temperature are detected as measured variables by means of resistance thermometers or thermocouples.

The maximum permissible ambient temperature depends on the maximum load P_i of the intrinsic safety output circuit and the temperature class according to the following table:

Maximum load	Temperature class		
	T6	T5	T4
P_i			
1000 mW	41 °C	56 °C	80 °C
900 mW	46 °C	61 °C	80 °C
800 mW	50 °C	65 °C	80 °C
700 mW	53 °C	68 °C	80 °C
660 mW	55 °C	70 °C	80 °C

(Table 1)

The lowest permissible ambient temperature is -40 °C.

Electrical data

Output circuit
(terminals H and G)

type of protection Intrinsic Safety EEx ia IIC resp. EEx ia IIB
for connection to an intrinsically safe circuit with the following
maximum values:

$$\begin{aligned} U_i &= 30 \text{ V} \\ I_i &= 160 \text{ mA} \\ P_i &\leq 1 \text{ W (see table 1)} \end{aligned}$$

effective internal capacitance and effective internal inductance
are negligibly small.

Programming circuit

type of protection Intrinsic Safety EEx ia IIC
only for a short-time connection of a standard personal com-
puter via the programming cable type PK 610 with the EC-
type-examination Certificate ZELM 99 ATEX 0011 to suitable
connections.

The effective internal capacitance and effective internal induc-
tance are negligibly small.



Prüf- und Zertifizierungsstelle ZELM Ex



Schedule to EC-TYPE-EXAMINATION CERTIFICATE ZELM 01 ATEX 0052

Input circuit
(terminals A, B, C, D)

type of protection Intrinsic Safety EEx ia IIC resp. EEx ia IIB

maximum values:

$$U_o = 6 \text{ V}$$

$$I_o = 15 \text{ mA}$$

$$P_o = 39 \text{ mW}$$

(trapezoidal output characteristic)

IIC bzw. IIB

effective external inductance

5 mH

10 mH

effective external capacitance

990 nF

1760 nF

References:

The output circuit and the input circuit are galvanically connected with each other.

The instruction manual has to be observed.

(16) Report No.

ZELM Ex 0480015073

(17) Special conditions for safe use

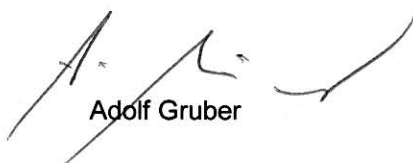
not applicable

(18) Essential Health and Safety Requirements

met by standards

Zertifizierungsstelle **ZELM Ex**

Braunschweig, March 02, 2001


Adolf Gruber



Sheet 3/3

EC-type-examination Certificates without signature and stamp are not valid. The certificates may only be circulated without alteration. Extracts or alterations are subject to approval by the Prüf- und Zertifizierungsstelle ZELM Ex. In the case of dispute, the German text shall prevail.